


UCRM

26-BIT WIEGAND RS-485 CONTROLLER

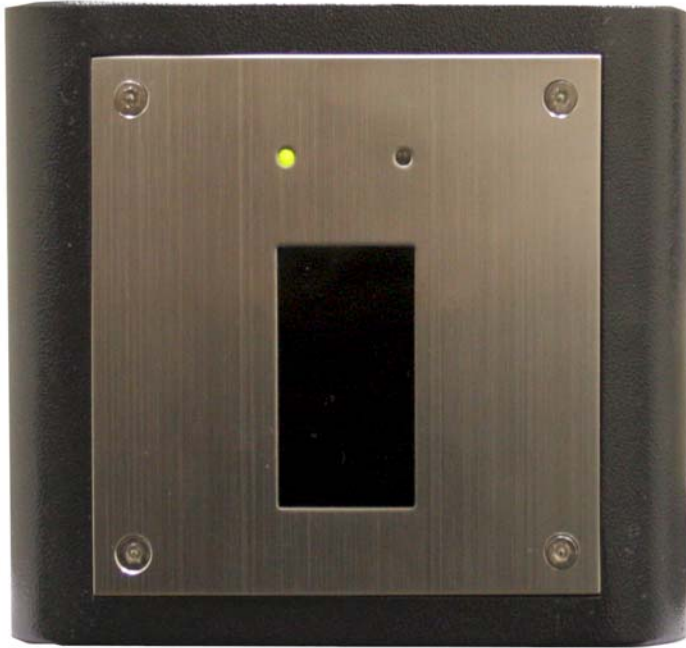

- 26 Wiegand to RS485 module for Quantum Series
 - Compatible with UWCR (26 Bit Wiegand Reader) or most other manufacturers 26 Bit Wiegand Reader
 - Up to 8-32 UCRM can be interfaced with the models above, contact us for more detail
 - Single relay • Invisible installation in wall or any hidden location
 - Audible tone and LED indicator for valid and invalid access
 - Independent access
 - Brushed stainless steel, dark gray powder coated back box
 - Tamper Proof Screws
 - Indoor or outdoor
- 24 months warranty*

TECHNICAL SPECIFICATION

POWER INPUT: 12VAC 40VA or 12VDC 2 Amps (12VAC is supplied by Pach & Company).
CURRENT CONSUMPTION: 50mA Idle, 475mA operation.
EMERGENCY BATTERY: 12VDC, 4Ahr rechargeable (customer supplied).
COMMUNICATION: RS-485 (maximum distance not to exceed 4000 ft, daisy chain connection).
OPERATING ENVIRONMENT: 10°F to 145°F. Relative Humidity 0% to 95%.

RELAY OUTPUT: From C Dry Contact 120VAC 10A/ 24VDC 10 A/ 250VAC 7A with 5 seconds output duration.
MOUNTING: Surface, Indoor or outdoor
CONSTRUCTION: 16 Gauge Cold Rolled Steel with Brushed Stainless Steel Faceplate.
DIMENSION: 6-1/8" (H) x 7-1/16" (W), 1-1/2" (D)
SHIPPING WEIGHT: 5 lbs.

ORDERING PART NUMBER

UCRM

USCR OPTIONS AND ACCESSORIES

UWCR: 26-Bit Wiegand Reader
UIISO: ISO 26 bit wiegand card (credit Card Size)
UFOB: 26 bit wiegand keyfob
UCLAM: 26 bit wiegand card with punch hole for badge holder
USP1: AC and Telephone surge protector

UPM1S: 42" H Single arm pedestal
UPM6L: 64" H Single arm pedestal
UPM2: Double Vertical Arm pedestal
UPM5: Double Horizontal Arm pedestal
UPM12E: 12" Expansion Arm use for all UPMs